

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
84

(11) **EP 0 754 437 A2**

(12)

(51) Int Cl.<sup>6</sup>: **A61B 17/39**

(22) Date of filing: 19.06.1996.

(72) Inventors:

- Goble, Nigel Mark  
Nr. Cardiff, CF3 8SB (GB)
- Goble, Colin Charles Owen  
Penarth, South Glamorgan, CF64 1AT (GB)

**(74) Representative: Blatchford, William, Michael et al  
Withers & Rogers  
4 Dyer's Buildings  
Holborn  
London EC1N 2JT (GB)**

(71) Applicant: GYRUS MEDICAL LIMITED  
Cardiff CF3 0LX (GB)

(57) An electrosurgical system including an electrode assembly having two electrodes for use immersed in an electrically conductive fluid has a generator with control circuitry for rapidly reducing the delivered radio frequency output power by at least 50% within approximately 100 $\mu$ s, corresponding to the time needed for a few cycles of the peak radio frequency output voltage to reach a pre determined threshold limit. In this way, tissue coagulation can be performed in, for example, saline without significant steam generation.

in a tissue vaporization or cutting mode to limit the size of the steam pocket at the electrodes and to avoid electrode burning.

The output power reduction is obtained by "on time control" (70) by producing a signal synchronous with the RF oscillator, thereby reducing progressively the "conduction state" of the gate (80) which connects the power supply with the oscillator. Switch mode power supply (66) can itself vary its output voltage as a function of signal (66) from the controller (72), the speed of variation however will be much slower than the one produced by "ON" time control mechanism.

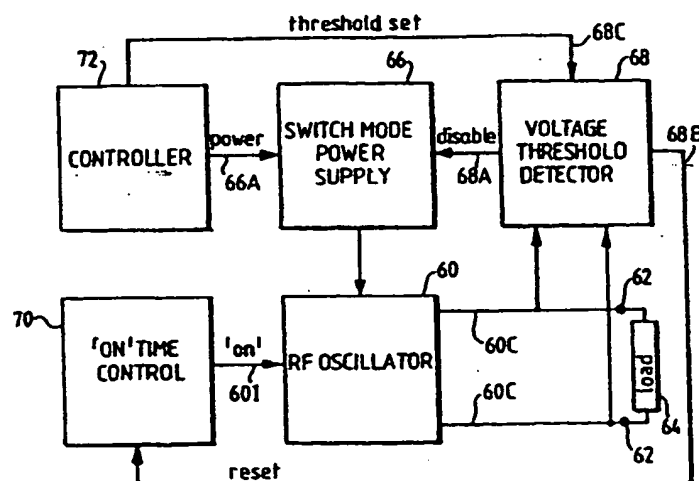


FIG.5.

## Description

This invention relates to an electrosurgical generator for delivering an electrosurgical current particularly but not exclusively in intracavitary endoscopic electrosurgery. The invention also relates to an electrosurgical system comprising the combination of a generator and an electrode assembly. The term "intracavitary" is used in this specification to denote electrosurgery in which living tissue is treated by least invasive surgical access to a body cavity. This may involve "underwater electrosurgery", a term denoting that the surgery is performed using an electrosurgical instrument with a treatment electrode or electrodes immersed in liquid at the operation site. The invention has particular application in the fields of urology, hysteroscopy and arthroscopy.

Intracavitary endoscopic electrosurgery is useful for treating tissue in anatomical or surgically created cavities of the body which can be accessed by methods involving minimal trauma to the patient, be this through a natural body passage or one created artificially. The cavity is distended to provide space for gaining access to the operation site to improve visualisation and to allow for manipulation of instruments. In low volume body cavities, particularly where it is desirable to distend the cavity under higher pressure, liquid rather than gas is more commonly used due to better optical characteristics and because it washes blood away from the operative site. Conventionally, a non-electrolyte solution such as glycine is used as the fluid distension medium when electrosurgery is being used, glycine being electrically non-conductive.

The limited surgical access encountered during intracavitary endoscopic procedures makes the removal of tissue pieces derived from a typical electrosurgical loop cutting electrode both difficult and time consuming. Vaporisation of tissue whereby the tissue is reduced to smoke and water vapour is a preferable technique in these situations, rather than the piecemeal removal of tissue. The products of vaporisation may be removed following dissolution within a liquid irrigating medium.

With regard to underwater endoscopic electrosurgery, the applicants have found that it is possible to use a conductive liquid medium such as normal saline in place of glycine. Normal saline is the preferred distension medium in underwater endoscopic surgery when electrosurgery is not contemplated or a non-electrical tissue effect such as laser treatment is being used. Although normal saline (0.9% w/v; 150mmol/l) has an electrical conductivity somewhat greater than that of most body tissue, it has the advantage that displacement by absorption or extravasation from the operative site produces little physiological effect and the so-called water intoxication effects of glycine are avoided.

Effective electrosurgical treatment of tissue which is totally immersed in liquid at the application site is difficult to achieve because the heat generated by the flow of electrical currents in both the tissue being treated and

surrounding conductive liquid tends to cause boiling of the liquid. The operating electrode is intermittently surrounded by water vapour rather than liquid, with consequent large variations in the electrical impedance of the load presented to the generator supplying the electrosurgical power to the electrode. Whilst this variation is mitigated by use of a non-conductive liquid, it cannot be eliminated entirely due to the release of body fluids at the operative site which elevates the electrical conductance of the liquid. Changes in tissue type also alter the load impedance. These effects result in difficulty in controlling the electrosurgical output to produce consistent effects on the tissue being treated. As a result, high powers are commonly employed to overcome this performance variation.

According to a first aspect of this invention, an electrosurgical generator for supplying radio frequency power to an electrical instrument, comprises a radio frequency output stage having at least a pair of electrosurgical output connections for the delivery of radio frequency power to the instrument, a power supply coupled to the output stage for supplying power to the output stage, and control circuitry including sensing means for deriving a sensing signal representative of the radio frequency peak output voltage developed across the output connections, wherein the output stage comprises a resonant output circuit coupled to the output connections and a switching device coupled to the resonant output circuit, and wherein the control circuitry is operable to actuate the switching device to reduce the delivered radio frequency power. The switching device is preferably connected between the resonant output circuit and one of a pair of supply rails of the power supply means, and connected so as to switch current repeatedly through the resonant output circuit at its resonant frequency. In order to cause a control overshoot, in terms of the degree to which the delivered power is reduced when the output voltage reaches the predetermined threshold, the control circuitry is so arranged and coupled to the switching device that it is capable of reducing the "on" time of the switching device during individual radio frequency switching cycles sufficiently rapidly to cause a 50% reduction in delivered output power within 100  $\mu$ s of the predetermined threshold having been reached. This allows surgery to be performed in a conductive fluid field, in particular in a saline solution. Large and rapid changes in load impedance can occur substantially without causing unwanted electrosurgical effects. For example, when it is desired to produce electrosurgical desiccation, any increase in impedance due to vaporisation of surrounding saline in the region of an electrode of the instrument which might otherwise lead to unwanted arcing at the required power level for effective desiccation can be largely prevented. When electrosurgical tissue cutting or tissue vaporisation is required, output voltage limitation can be used to prevent electrode burning and/or excessive tissue vaporisation.

The control circuitry may include a control line feed-

ing a first power reduction control signal to the radio frequency output stage. The output stage, which may be a radio frequency power oscillator, typically has as the oscillating element a radio frequency power device, and in the preferred embodiment, the control circuitry is arranged such that at least a 50% reduction in output power is brought about in a period of less than 20 $\mu$ s after the output voltage reaches the predetermined threshold by reducing the period of conduction of the device during individual cycles of the radio frequency output signal. Such alteration in the period of conduction is advantageously achieved independently of any variation in supply voltage to the radio frequency power device. In practice, the reduction in output power is brought about using a single control variable, i.e. the peak output voltage or peak-to-peak output voltage, independently of supply voltage and independently of the delivered output power which varies according to the load impedance and the supply voltage. Thus, triggering of a power reduction occurs at the same preset output voltage threshold but at different output power and load impedance values, according to circumstances.

As an adjunct to direct control of the radio frequency output stage, the means for causing a reduction in output power may include a further control line which is coupled to the power supply means, the control circuitry being arranged such that a second power reduction signal is fed to the power supply means to effect a reduction in the average power supply voltage supplied to the output stage. Typically, the rate of reduction of power due to lowering of the power supply voltage is comparatively slow, but the combination of two means of control can produce a larger range of available output power levels.

Thus, according to a second aspect of the invention, there is provided an electrosurgical generator for supplying power to an electrosurgical instrument, the generator comprising a radio frequency output stage including a radio frequency power device and having at least a pair of electrosurgical output connections for delivery of radio frequency power to the instrument, a power supply coupled to the output stage, and control circuitry including sensing means for deriving a sensing signal representative of the load impedance across the output connections, the control circuitry having a first output coupled to the power device to reduce the radio frequency duty cycle thereof and a second output coupled to the power supply to effect a reduction in the average power supply voltage supplied to the output stage, the said reductions occurring in response to the sensing signal reaching a predetermined threshold value.

In the case of the power supply means being a switched mode power supply having output smoothing components, the supply circuit may be arranged such that the second power reduction control signal has the effect of disabling the supply circuit, e.g. by gating the pulsed output. Accordingly, a high-speed control response is obtained with the supply voltage falling relatively slowly after the initial step power reduction to en-

able the radio frequency duty cycle of the power device to be increased again, thereby allowing further high-speed power reductions if necessary.

The technique of directly controlling the radio frequency output stage can be performed by repeatedly producing, firstly, a rapid reduction in the cycle-by-cycle conduction period of the power device from a peak level to a trough level when the output threshold is reached, followed by, secondly, a progressive increase in the conduction period until the conduction period again reaches its peak level, the radio frequency output voltage being monitored during the progressive increase. This rapid reduction and progressive increase sequence may be repeated until the peak conduction period level can be reached without the output voltage exceeding the output threshold due to the supply voltage from the switched mode power supply having fallen sufficiently since it was disabled. Re-enabling of the supply circuit typically occurs after a delay, and conveniently at the end of the first switched mode switching cycle in which the output voltage has not reached the threshold for the whole of the switching cycle.

The output stage preferably includes an output resonant circuit having a Q which is sufficiently high to remove switching noise from the switching device or devices of the stage without unduly slowing the response to the output voltage reaching the predetermined threshold. Typically, the Q is sufficient to achieve a crest factor below 1.5, the crest factor being the ratio of the peak and r.m.s. values of the output voltage waveform.

Other aspects of the invention include a generator for underwater electrosurgery having an output impedance in the range of from 100 ohms to 250 ohms, and preferably between 130 and 190 ohms. Such a generator has its radio frequency output stage operable to produce a CW (continuous wave) output, i.e. with a 100% duty cycle or without on/off pulse width modulation at a frequency lower than the r.f. oscillation frequency. In effect, the output stage may operate as an open loop stage with a power/load impedance characteristic having a peak (preferably a single peak) at about 150 to 160 ohms and with the curve decreasing continuously with decreasing impedance below the peak and increasing impedance above the peak.

The invention may also include an electrosurgical generator for supplying radio frequency power to an electrosurgical instrument for operation in an electrically conductive fluid medium, the generator comprising a radio frequency output stage having a radio frequency power device and at least a pair of electrosurgical output connections for the delivery of radio frequency power to electrodes, power supply means coupled to the output stage, and control circuitry including sensing means for deriving a sensing signal representative of the radio frequency output voltage developed across the output connections, and means responsive to the sensing signal for causing a reduction in delivered output power when the sensing signal is indicative of a predetermined out-

put voltage threshold having been reached, wherein the control circuitry is arranged such that the reduction in output power is effected by reducing the period of conduction of the device during individual cycles of radio frequency oscillation, preferably independently of the supply voltage to the device.

According to another aspect of the invention, an electrosurgical generator for supplying electrosurgical power to an electrosurgical instrument comprises a radio frequency output stage having at least a pair of electrosurgical output connections for the delivery of radio frequency power to the instrument, means coupled to the output stage for supplying power to the output stage, and control circuitry including sensing means for deriving a sensing signal representative of the radio frequency output voltage developed across the output connections and means responsive to the sensing signal for causing at least a 50% reduction in delivered output power when the sensing signal is indicative of a predetermined output voltage threshold having been reached, the said reduction being effected within a period of 20 $\mu$ s or less.

The invention also includes an electrosurgical system including a generator for generating radio frequency power and an electrosurgical instrument having at least one electrode for use immersed in a conductive liquid, wherein the generator comprises an output stage including a radio frequency power device and at least a pair of output connections arranged to receive radio frequency power from the power device, one of the pair of connections being connected to the said electrode, and wherein the generator further comprises a control stage operable to reduce the conduction time of the power device during individual radio frequency cycles in response to a sensing signal (preferably the peak output voltage) representative of the load impedance presented to the generator across the output connections exceeding a predetermined sensing signal threshold value, whereby the radio frequency power delivered to the electrode structure is rapidly reduced when the conductive liquid is vaporised. The electrode structure may include a distal treatment electrode and a liquid contact electrode spaced proximally from the distal electrode, both electrodes being for use surrounded by the conductive liquid and each being connected to a respective one of the pair of output connections the control stage being operable to reduce the reduction time of the power device when the conductive liquid at the distal electrode is vaporised. The electrosurgical instrument may provide an electrode structure having juxtaposed first and second electrodes for immersion in the conductive liquid, the first and second electrodes respectively forming a tissue contact electrode at an extreme distal end of the instrument and a return electrode proximally spaced from the tissue contact electrode.

According to yet another aspect of the invention, there is provided an electrosurgical system operable in at least a tissue desiccation mode and a tissue cutting

or vaporisation mode comprising a generator for generating radio frequency power and an electrosurgical instrument coupled to the generator, the instrument having an electrode structure for operation immersed in a conductive liquid, wherein the generator includes a mode selection control and has power control circuitry for automatically adjusting the radio frequency power supplied to the electrode structure to limit the peak generator output voltage to a first value when the desiccation mode is selected and to at least one second value when the cutting or vaporisation mode is selected, the second value or values being higher than the first value. The first and second values are advantageously in the ranges of from 150V to 200V, and from 250V to 600V respectively, these voltages being peak voltages.

From a method aspect, the invention provides a method of operating an electrosurgical system having at least a tissue desiccation mode and a tissue cutting or vaporisation mode, the system having a radio frequency power generator coupled to an electrode assembly having an electrode for operation in a conductive liquid, wherein the method comprises: selecting one of the said modes; when the desiccation mode is selected, automatically adjusting the radio frequency power supplied to the electrode assembly to maintain the conductive liquid adjacent the electrode at its boiling point for tissue desiccation without creating a vapour pocket surrounding the electrode; and when the cutting or vaporisation mode is selected, automatically adjusting the radio frequency power supplied to the electrode to maintain a vapour pocket surrounding the electrode. In the cutting or vaporisation mode the radio frequency power supply to the electrode may be automatically limited to prevent electrode overheating or erosion. The radio frequency power supply to the electrode may be automatically adjusted by limiting the output voltage to predetermined first and second voltage values, the first voltage value being used in the desiccation mode and the second voltage value, which is higher than the first voltage value, being used in the cutting or vaporisation mode.

The invention also provides a method of operating an electrosurgical system which has a generator coupled to an electrode assembly having an electrode for operation in a conductive liquid, wherein the method comprises applying radio frequency power to the electrode, monitoring an electrical signal related to the load impedance presented to the generator, and reducing the applied power when the said signal reaches a predetermined threshold value associated with an increased load impedance, whereby only sufficient radio frequency power is applied to the electrode to maintain the liquid adjacent the electrode at its boiling point for tissue desiccation without creating a vapour pocket surrounding the electrode.

The predetermined threshold is advantageously representative of peak output voltage at the generator output connections.

The invention further provides an electrosurgical

generator for supplying power to an electrosurgical instrument, the generator comprising a radio frequency output stage having a radio frequency switching device and a pair of electrosurgical output connections for delivering power to the instrument, and control circuitry including sensing means for deriving and sensing signal representative of the radio frequency peak output voltage developed across the output connections, wherein the control circuitry has an output coupled to the switching device and is operable to reduce the duty cycle of the switching device in response to the peak output voltage reaching a predetermined threshold value thereby to reduce the power delivered to the instrument. Preferably the control circuitry is operable to effect a control overshoot in that the output power is reduced by at least 50% within 100 $\mu$ s of the threshold having been reached. The sensing signal is representative of peak output voltage largely independently of the output waveform crest factor and the control circuitry includes no elements (such as averaging circuitry) in the feedback loop to the switching device which cause a signal delay of greater than 100 $\mu$ s.

The invention will now be described by way of example with reference to the drawings in which:-

Figure 1 is a diagram showing an electrosurgical system in accordance with the invention;

Figure 2 is a fragmentary view of a first electrode assembly for tissue desiccation, shown in use and immersed in a conductive liquid;

Figure 3 is a load characteristic graph illustrating the variation in load impedance produced by an electrode assembly such as that shown in Figure 2 when used in a conductive liquid, according to the delivered output power;

Figure 4 is a fragmentary view of a second electrode assembly for tissue vaporisation, shown in use immersed in a liquid;

Figure 5 is a block diagram of a generator in accordance with the invention;

Figure 6 is a block diagram of part of the control circuitry of the generator of Figure 5;

Figure 7 is a waveform diagram showing a typical RF output voltage variation pattern obtained with the generator of Figures 5 to 7, the voltage being shown varying with time according to variations in load impedance and generator output stage supply voltage;

Figure 8 is a circuit diagram of part of the generator of Figures 5 and 6;

Figure 9 is a graph showing the variation of output power produced by the generator as a function of the load impedance presented to it by the electrode assembly, the output power variation being shown in two operation modes of the generator; and

Figure 10 is a graph showing the variation of output power for generator as a function of load impedance after modification of the generator characteristics in response to output voltage sensing.

Historically, underwater electrosurgery has been the most demanding electrosurgical application in terms of instrument engineering. The reason for this is that the electrosurgical power requirement is very high, specifically because it is necessary to create arcs for cutting and tissue disruption in circumstances in which power is dissipated quickly by the surrounding liquid. Consequently, high currents are used to ensure vaporisation of liquid surrounding the electrode. Power levels up to 300 watts are commonly used. Conventionally, underwater electrosurgery is performed using a non-conductive fluid or irrigant to eliminate electrical conduction losses. Glycine, which is commonly used, has the disadvantage that in the course of an operation, veins may become severed and irrigant may be infused into the circulation. This absorption causes among other things a dilution of serum sodium which can lead to a condition known as water intoxication.

Accordingly, the applicants propose use of a conductive liquid medium such as normal saline, electrosurgery being performed with using a system comprising a generator and an instrument, the instrument having a dual-electrode structure with the saline acting as a conductor between the tissue being treated and one of the electrodes, hereinafter called the "return electrode". The other electrode is applied directly to the tissue. This other electrode is hereinafter called the "active electrode".

Such a system is shown in Figure 1. The generator 10 has an output socket 10S providing a radio frequency (RF) output for an instrument in the form of a handpiece 12 via a connection cord 14. Activation of the generator may be performed from the handpiece 12 via a control connection in cord 14 or by means of a footswitch unit 16, as shown, connected separately to the rear of the generator 10 by a footswitch connection cord 18. In the illustrated embodiment, footswitch unit 16 has two footswitches 16A and 16B for selecting a desiccation mode and a vaporisation mode of the generator respectively. The generator front panel has push buttons 20 and 22 for respectively setting desiccation and vaporisation power levels, which are indicated in a display 24. Push buttons 26 are provided as an alternative means for selection between desiccation and vaporisation modes.

Handpiece 12 mounts a detachable electrode assembly 28 having a dual electrode structure, as shown in the fragmentary view of Figure 2.

Figure 2 is an enlarged view of the distal end of electrode assembly 28. At its extreme distal end the assembly has an active electrode 30 which, in this embodiment, is formed as a series of metal filaments connected to a central conductor 32. The filaments may be made of stainless steel. Proximally of the active electrode 30 and spaced from the latter by a longitudinally and radially extending insulator 34 is a return electrode 36. The return electrode 36 is arranged coaxially around the inner conductor 32 as a sleeve 38 which extends as a tubular shaft 40 to the proximal end of the assembly 28 where it is connected in the handpiece 12 to conductors in the connection cord 14. Similarly, the inner conductor 32 extends to the handpiece and is connected to a conductor in cord 14. The electrode assembly 28 has an insulating sheath 42 which covers shaft 40 and terminates proximally of the insulator 34 to leave the distal end of shaft 40 exposed as the return electrode 36.

In operation as a desiccation instrument, the electrode assembly 28 is applied as shown in Figure 2 to the tissue 44 to be treated, the operation site being immersed in a normal saline (0.9%w/v) solution, here shown as a drop 46 of liquid surrounding the distal end portion of the electrode assembly 28. The liquid immerses both the active electrode 30 and the return electrode 36.

Still referring again to Figure 2, the metallic filaments forming the active electrode 30 are all electrically connected together and to the inner conductor 32 of the electrode assembly to form a unitary active electrode. Insulator 34 is an insulating sleeve, the distal end portion of which is exposed proximally of the exposed part of the active electrode 30. Typically, this sleeve is made of a ceramic material to resist damage from arcing. The return electrode terminates at a point short of the end of the insulator 36 so that it is both radially and axially spaced from the active, or tissue contact, electrode 30. The surface area of the return electrode is considerably greater than that of the active electrode 30. At the distal end of the electrode assembly, the diameter of the return electrode is typically in the region of from 1mm to 3mm, with the longitudinal extent of the exposed part of the return electrode being typically between 1mm and 5mm with the longitudinal spacing from the active electrode being between 1mm and 5mm.

In effect, the electrode assembly is bipolar, with only one of the electrodes (30) actually extending to the distal end of the unit. This means that the return electrode, in normal circumstances, remains spaced from the tissue being treated and a current path exists between the two electrodes via the tissue and the conductive liquid which is in contact with the return electrode 36.

The conductive liquid 46 may be regarded, as far as the delivery of bipolar electrosurgical energy is concerned, as a low impedance extension of the tissue. Radio frequency currents produced by the generator 10 flow between the active electrode 30 and the return electrode 36 via the tissue 44 and the immersing conductive

liquid 46. The particular electrode arrangement shown in Figure 2 is most suitable for tissue desiccation.

The axial as well as radial separation between the electrodes avoids the small spacing of the conventional bipolar arrangement in which both electrodes are tissue-contacting. As a result, there is less danger of unwanted arcing across the insulation surface, which allows comparatively high power dissipation for desiccation treatment, and, in the case of tissue cutting or vaporisation, prevents excessive arcing which can lead to interelectrode insulation damage.

The immersing saline solution may be provided from a conduit (not shown) forming part of the instrument 12. Thus, the invention may take the form of an electrosurgical system for the treatment of tissue immersed in a conductive fluid medium, comprising an electrosurgical instrument having a handpiece and an instrument shaft, and, on the end of the shaft, an electrode assembly, the assembly comprising a tissue contact electrode which is exposed at the extreme distal end of the instrument, and a return electrode which is electrically insulated from the tissue contact electrode and has a fluid contact surface spaced proximally from the exposed part of the tissue contact electrode, the system further comprising a radio frequency generator coupled to the electrode assembly of the instrument, a reservoir of electrically conductive fluid, such as the normal saline solution, and a conduit, typically an integral part of an endoscope, for delivering the liquid from the reservoir to the region of the electrode assembly. Pressure for delivering the liquid may be provided by a pump forming part of the apparatus.

Since in this embodiment of electrode assembly 28, the active electrode 30 is made of stainless steel filaments in the form of a brush, the electrode is flexible, providing a reproducible tissue effect which is comparatively independent of the application angle of the electrode to the tissue surface. The flexibility of the electrode 30 also results in a differential contact area of the active electrode dependent on the applied pressure, allowing variations in the breadth of desiccation over the surface of the tissue, reducing procedure time.

Desiccation occurs by virtue of radio frequency currents passing between the active electrode 30 and the conductive liquid 46 via the outer layer of the tissue 44 immediately beneath and in an area surrounding the active electrode 30. The output impedance of the generator is set at a level commensurate with the load impedance of the electrode assembly when used as shown in Figure 2 with both electrodes in contact with the conductive liquid 46. In order to sustain this matched state for tissue desiccation, the output power of the generator is automatically controlled in a manner which will be described below so that vapour bubbles of significant size are substantially prevented from appearing at the active electrode 30, thereby avoiding a consequent increase in load impedance. In this way, the active electrode can be continually wetted by the conductive liquid so that,

whilst the tissue water is removed by thermal desiccation, the impedance reaches an upper limit corresponding to the point at which the conductive liquid starts to boil. As a result, the system is able to deliver high power levels for desiccation without unwanted conductive liquid vaporisation leading to unwanted tissue effects.

The electrical behaviour of the electrode assembly when the electrodes 30 and 36 are immersed in the conductive liquid 46 is now considered with reference to the graph of Figure 3.

When power is first applied, there is presented to the generator an initial load impedance  $r$  which is governed by the geometry of the electrode and the electrical conductivity of the conductive liquid. The value of  $r$  changes when the active electrode touches the tissue. The higher the value of  $r$ , the greater is the propensity of the conductive liquid to vaporise. As power is dissipated in the tissue and the conductive liquid, the conductive liquid increases in temperature. In the case of normal saline, the temperature coefficient of conductivity is positive and the corresponding impedance coefficient is therefore negative so that the impedance initially falls. Thus, the curve in Figure 3 indicates a fall in load impedance as the delivered power is increased, the impedance falling through point A to a minimum at point B, at which point saline is in immediate contact with the electrode reaches boiling point. Small vapour bubbles now form on the surface of the active electrode and the impedance starts to rise as shown by the curve rising from point B to point C. Thus, once the boiling point has been reached, the arrangement displays a dominant positive power coefficient of impedance.

As the vapour bubbles form, there is an increase in the power density at the remaining active electrode to saline interface (the exposed area of the active electrode not covered by vapour bubbles) which further stresses the interface, producing more vapour bubbles and thus even higher power density. This is a runaway condition, with an equilibrium point only occurring once the electrode is completely enveloped in vapour. Thus, for a given set of variables, there is a power threshold corresponding to point C at which this new equilibrium is reached.

In the light of the foregoing, it will be appreciated that the region between points B and C in Figure 3 represents the upper limit of desiccation power which can be achieved.

Upon formation of an electrode-enveloping vapour pocket, the impedance elevates to about 1k $\Omega$ , as shown by point D in Figure 3, the actual impedance value depending on a number of system variables. The vapour is then sustained by discharges across the pocket between the active electrode and the vapour/saline interface.

This state of affairs is illustrated by the diagram of Figure 4 which shows an alternative electrode assembly 28A having a hemispherical or ball electrode 30A in place of the brush electrode 30 of the embodiment of

Figure 2. As before, the return electrode 36A is proximally spaced from the active electrode 30A by an intervening insulator 34A. The ball electrode is preferred for tissue vaporisation.

Once in the vaporisation equilibrium state, the vapour pocket, shown by the reference 50 in Figure 4, is sustained by discharges 52 across the vapour pocket between the active electrode 30A and the vapour to saline interface. The majority of power dissipation occurs within this pocket with consequent heating of the active electrode. The amount of energy dissipation in this conduction is a function of the delivered power. It will be noted from Figure 3 that the vaporisation mode, indicated by the dotted boundary lines, can be sustained at much lower power levels than are required to bring about formation of the vapour pocket. The impedance/power characteristic consequently displays hysteresis. Once the vaporisation mode has been established, it can be maintained over a comparatively wide range of power levels, as shown by the inclined part of the characteristic extending on both sides of point D. However, increasing the delivered output power beyond that represented by point D causes a rapid rise in electrode temperature, potentially damaging the electrode. To collapse the vapour pocket and to return to desiccation mode requires a significant power reduction back to point A, direct contact between the active electrode and the saline being reestablished and the impedance falling dramatically. The power density at the active electrode also falls so that the temperature of the saline now falls below boiling point and the electrode is then once again in a stable desiccation equilibrium.

The generator to be described hereinafter has the ability to sustain both the desiccation mode and the vaporisation mode. Whilst in general the electrode assemblies illustrated in Figures 2 and 4 can be used in either mode, the brush electrode of Figure 2 is preferred for desiccation due to its wide potential area of coverage, and the ball electrode of Figure 4 is preferred for vaporisation due to its small active electrode/return electrode surface area ratio. As can be seen from Figure 4, tissue vaporisation occurs when the vapour pocket 50 intersects the tissue surface, with the electrode assembly preferably being held spaced above the tissue surface by a small distance (typically 1 mm to 5mm).

The runaway condition which occurs when the delivered power reaches the level shown by point C in Figure 3 is exacerbated if the generator has a significant output impedance, because the output voltage can then suddenly rise. With increased power dissipation and without the presence of the cooling liquid around the active electrode 30, the electrode temperature rises rapidly with consequent damage to the electrode. This also produces uncontrollable tissue disruption in place of the required desiccation. For this reason, the preferred generator has an output source impedance which, approximately at least matches the load impedance of the electrode structure when wetted.

The preferred generator now to be described allows both desiccation electrosurgery substantially without unwanted cell disruption, and electrosurgical cutting or vaporisation substantially without electrode burning. Although intended primarily for operation in a conductive liquid distension medium, it has application in other electrosurgical procedures, e.g. in the presence of a gaseous distension medium, or wherever rapid load impedance changes can occur.

Referring to Figure 5, the generator comprises a radio frequency (RF) power oscillator 60 having a pair of output connections 60C for coupling via output terminals 62 to the load impedance 64 represented by the electrode assembly when in use. Power is supplied to the oscillator 60 by a switched mode power supply 66.

In the preferred embodiment, the RF oscillator 60 operates at about 400 kHz, with any frequency from 300 kHz upwards into the HF range being feasible. The switched mode power supply typically operates at a frequency in the range of from 25 to 50 kHz. Coupled across the output connections 60C is a voltage threshold detector 68 having a first output 68A coupled to the switched mode power supply 66 and a second output 68B coupled to an "on" time control circuit 70. A microprocessor controller 72 coupled to the operator controls and display (shown in Figure 1), is connected to a control input 66A of the power supply 66 for adjusting the generator output power by supply voltage variation and to a threshold-set input 68C of the voltage threshold detector 68 for setting peak RF output voltage limits.

In operation, the microprocessor controller 72 causes power to be applied to the switched mode power supply 66 when electrosurgical power is demanded by the surgeon operating an activation switch arrangement which may be provided on a handpiece or footswitch (see Figure 1). A constant output voltage threshold is set independently of the supply voltage via input 68C according to control settings on the front panel of the generator (see Figure 1). Typically, for desiccation or coagulation the threshold is set at a desiccation threshold value between 150 volts and 200 volts. When a cutting or vaporisation output is required, the threshold is set to a value in the range of from 250 or 300 volts to 600 volts. These voltage values are peak values. Their being peak values means that for desiccation at least it is preferable to have an output RF waveform of low crest factor to give maximum power before the voltage is clamped at the values given. Typically a crest factor of 1.5 or less is achieved.

When the generator is first activated, the status of the control input 60I of the RF oscillator 60 (which is connected to the "on" time control circuit 70) is "on", such that the power switching device which forms the oscillating element of the oscillator 60 is switched on for a maximum conduction period during each oscillation cycle. The power delivered to the load 64 depends partly on the supply voltage applied to the RF oscillator 60 from the switched mode power supply 66 and partly on the

load impedance 64. If the supply voltage is sufficiently high, the temperature of the liquid medium surrounding the electrodes of the electrosurgical instrument (or within a gaseous medium, the temperature of liquids contained within the tissue) may rise to such an extent that the liquid medium vaporises, leading to a rapid increase in load impedance and a consequent rapid increase in the applied output voltage across terminals 12. This is an undesirable state of affairs if a desiccation output is required. For this reason, the voltage threshold for a desiccation output is set to cause trigger signals to be sent to the "on" time control circuit 70 and to the switched mode power supply 66 when the threshold is reached. The "on" time control circuit 70 has the effect of virtually instantaneously reducing the "on" time of the RF oscillator switching device. Simultaneously, the switched mode power supply is disabled so that the voltage supplied to oscillator 60 begins to fall.

Subsequent control of the "on" time of individual cycles of the oscillator 60 will be understood by considering the internal configuration of the "on" time control circuit 70 which is shown in Figure 6. The circuit comprises an RF sawtooth generator 74 (synchronised at the RF oscillation frequency by a synchronisation signal derived from the oscillator and applied to a synchronisation input 74I), and a ramp generator 76 which is reset by a reset pulse from the output 68B of the voltage threshold detector 68 (see Figure 5) produced when the set threshold voltage is reached. This reset pulse is the trigger signal referred to above. The "on" time control circuit 70 further comprises a comparator 78 for comparing the sawtooth and ramp voltages produced by the sawtooth and ramp generators 74 and 76 to yield a square wave control signal for application to the input 60I of the RF oscillator 60. As shown by the waveform diagrams in Figure 6, the nature of the sawtooth and ramp waveforms is such that the mark-to-space ratio of the square wave signal applied to the oscillator 60 progressively increases after each reset pulse. As a result, after a virtually instantaneous reduction in "on" time on detection of the output voltage reaching the set voltage threshold, the "on" time of the RF oscillator is progressively increased back to the original maximum value. This cycle is repeated until the supply voltage for the oscillator from power supply 66 (Figure 5) has reduced to a level at which the oscillator can operate with the maximum conduction period without the output voltage breaching the set voltage threshold as sensed by the detector 68.

The output voltage of the generator is important to the mode of operation. In fact, the output modes are defined purely by output voltage, specifically the peak output voltage. The absolute measure of output voltage is only necessary for multiple term control. However, a simple single term control (i.e. using one control variable) can be used in this generator in order to confine the output voltage to predetermined limit voltages. Thus, the voltage threshold detector 68 shown in Figure 5 compares the RF peak output voltage with a preset DC



threshold level, and has a sufficiently fast response time to produce a reset pulse for the "on" time control circuit 70 within one RF half cycle.

Before considering the operation of the generator further, it is appropriate to refer back to the impedance/power characteristic of Figure 3. It will be appreciated that the most critical control threshold is that applicable during desiccation. Since vapour bubbles forming at the active electrode are non-conducting, the saline remaining in contact with the electrode has a higher power density and consequently an even greater propensity to form vapour. This degree of instability brings about a transition to a vaporisation mode with the same power level due to the runaway increase in power density at the active electrode. As a result, the impedance local to the active electrode rises. Maximum absorbed power coincides with the electrode condition existing immediately before formation of vapour bubbles, since this coincides with maximum power distribution and the greatest wetted electrode area. It is therefore desirable that the electrode remains in its wetted state for the maximum desiccation power. Use of voltage limit detection brings about a power reduction which allows the vapour bubbles to collapse which in turn increases the ability of the active electrode to absorb power. For this reason, the generator described in this specification includes a control loop having a large overshoot, in that the feedback stimulus of the peak voltage reaching the predefined threshold causes a large instantaneous reduction in power by causing a reduction in peak output voltage to a level significantly below the peak output voltage level set by the threshold detector 68. This control overshoot ensures a return to the required wetted state.

In the generator described above with reference to Figures 5 and 6, power reduction in response to voltage threshold detection takes place in two ways:-

(a) an instantaneous reduction in RF energy supplied to the resonant output circuit of the oscillator, and

(b) a shut down of DC power to the oscillator for one or more complete cycles of the switched mode power supply (i.e. typically for a minimum period of 20 to 40  $\mu$ s).

In the preferred embodiment, the instantaneous power reduction is by at least three quarters of available power (or at least half voltage) from the DC power supply, but continuous voltage threshold feedback continually causes a reduction in delivered power from the DC power supply. Thus, a high speed response is obtained in the RF stage itself, with the DC supply voltage tracking the reduction to enable the RF stage to return to a full duty cycle or mark-to-space ratio, thereby enabling further rapid power reductions when the voltage threshold is again breached.

The effect of this process on the RF output voltage

is shown in the waveform diagram of Figure 7, containing traces representative of the output voltage, the oscillator supply voltage, and the load impedance during a typical desiccation episode over a 1ms period. Starting on the lefthand side of the diagram with the supply voltage approximately constant, the output voltage increases with increasing load impedance to a point at which the output voltage threshold is reached, whereupon the above-described instantaneous reduction in oscillator "on" time occurs. This produces a rapid decrease in the RF output voltage, as shown, followed by a progressive increase, again as described above. When the output voltage reaches the threshold voltage, the voltage threshold detector 68 (shown in Figure 5) also disables the power supply, leading to a gradual decrease in the supply voltage. As a result, when the "on" time of the oscillator device has once again reached its maximum value, illustrated by point a in Figure 7, the threshold voltage has not been reached. However, the load impedance begins rising again, causing a further, albeit slower, increase in the output voltage until, once again, the threshold voltage is reached (point b). Once more, the "on" time of the oscillator is instantly reduced and then progressively increased, so that the output voltage waveform repeats its previous pattern. Yet again, the threshold voltage is reached, again the output voltage is instantly reduced (at point c), and again the "on" time is allowed to increase. On this occasion, however, due to the supply voltage having further reduced (the power supply still being disabled), the output voltage does not reach the threshold level (at point d) until a considerably longer time period has elapsed. Indeed, the length of the period is such that the output voltage has failed to reach the threshold voltage over a complete switching cycle of the power supply, so that it has in the meantime been enabled (at point e).

During this period the power supplied to the electrode has been sufficient to further increase the load impedance. The erratic impedance behaviour is typical of the commencement of vapour formation. Consequently, when the threshold voltage is next reached (at point e), several successive cycles of "on" time reduction and increase occurring one after the other are required (see f) combined with a further disabling (see g) of the power supply in order to maintain the voltage below the threshold.

It will be seen, then, that the control circuitry 70, 72 (Figure 5) operates dynamically to control the output voltage both sufficiently rapidly and to a sufficient degree to maintain the voltage at a level consistent with, in this case, the level required for desiccation without tissue disruption due to arcing. The same technique can be used with a different threshold voltage to limit the output voltage to prevent electrode burning and/or excessive tissue vaporisation. In the latter case, the voltage limit may be set to a level between 250 volts (preferably 300 volts) and 600 volts.

Due to the high power density at the active elec-

trode during the vaporisation mode, the great majority of delivered power is dissipated in the proximity of the electrode. In the vaporisation mode, it is desirable that a minimum of saline heating occurs, but that any tissue which encroaches the vapour boundary of the active electrode is vaporised. In the vaporisation mode, the vapour is sustained by arcs within the vapour pocket as described above with reference to Figure 4. Increasing the output voltage during vaporisation results in increased volume of tissue removal due to the increased size of the vapour pocket. Collapse of the vapour pocket during tissue vaporisation has greater consequence, due to the increased necrosis as a result of the greater power dissipation in the surrounding saline. Vapour pocket collapse can be prevented by, firstly, arranging for the electrode impedance in vaporisation mode to be such that the instrument is in an unmatched condition as regards impedance, with result that the resonant output circuit Q is high and the output voltage does not change so rapidly as with lower load impedances and, secondly, the active electrode has a significant heat capacity that sustains the vapour pocket for a significant period.

An unwanted increase in the size of the vapour pocket can be prevented by limiting the peak output voltage during the vaporisation mode, which may be conveniently carried out by substituting a different threshold value for the voltage threshold detector 68 (see Figure 5) when in the vaporisation mode.

The circuitry of the RF oscillator 60, voltage threshold detector 68, and "on" time control circuit 70 (shown in Figure 5) in the preferred generator in accordance with the invention is shown in Figure 8.

Referring now to Figure 8, the RF oscillator comprises a IGBT (insulated gate bipolar transistor) 80 acting as an RF switching device which pumps energy into a parallel resonant circuit comprising the primary winding 82P of transformer 82 and a parallel-connected resonating capacitor 84. RF power is supplied from the transformer secondary winding 82S via isolating capacitors 86, 88 to RF output terminals 62. Power for the oscillator transistor 80 is supplied on a high voltage supply line 90 which is connected to the output of the switched mode power supply 66 (shown in Figure 5). Supply line 90 is decoupled by capacitor 92.

The oscillator feedback loop runs from the resonant primary winding 82P (on the opposite side of the winding from the supply line 90) via a phase shift network comprising capacitor 94, resistor 96, and clamping diodes 98, 100, and via a field effect transistor (FET) 104, the voltage controlled monostable represented by comparator 78 and associated components, and the driver 108, which is connected to the gate of transistor 80.

The voltage on that side of the primary winding 82P which is coupled to transistor 80 is substantially sinusoidal and alternates at a frequency defined by the parallel resonant combination of the winding inductance and capacitor 84. Typically the voltage swing is greater than

twice the supply voltage on supply line 90, falling below ground voltage in negative half-cycles.

The phase-shift network 94, 96, 98, 100 provides a positive-going square wave which is 90° phase-advanced with respect to the primary voltage. Thus, FET 104 is turned on approximately when the voltage on primary winding 82P has just reached its minimum value, and off when it has just reached its maximum value. When FET 104 is turned on a timing capacitor is rapidly discharged and the output of comparator 78 is turned off. The driver 108 is non-inverting and consequently transistor 80 is also turned off at this point. It follows that the transistor "off" point is repeatable and has a constant phase relationship with respect to the primary voltage by virtue of the feedback path described above. The logic of the feedback path is also such that the feedback signal fed to the gate connection of transistor 80 has a logic level of "1" when the primary voltage is decreasing (and the potential difference across the primary winding 82P is increasing). The "off" point occurs substantially at a primary voltage peak, i.e. when the primary voltage is at its minimum value in the present case.

Unlike the "off" point, the "on" point of transistor 80 is variable as will now be described. The instant at which the logic level at the output of comparator 78 and on the base of device 80 changes to "1" depends on the reference voltage applied to the inverting input 78I of comparator 78. As a result, the delay between device 80 switching off and switching on is determined by this comparison of voltage applied to input 78I of comparator 78. In other words, an "on" signal to device 80 is delayed with respect to switching off by a period which is in accordance with the reference voltage on the inverting input. This reference voltage is dependent on the voltage appearing across resistor 112 which is part of a potential divider consisting also of resistor 114 and potentiometer 116. Potentiometer 116 sets the minimum switching on delay, corresponding to the maximum duty cycle of transistor 80. The voltage appearing across resistor 112 is variable and represents the control range of "on" time adjustment between 25% of the maximum duty cycle and 100%. Timing capacitor 110 is charged by variable resistor 118 (preset for an appropriate time constant) from a low voltage supply line 120.

Comparing Figure 8 with Figure 6, it will be appreciated that the voltage on the non-inverting input 78N of comparator 78 has a sawtooth waveform as shown in Figure 6, the waveform being produced by the repeated triggering of FET 104 and discharging of capacitor 110, each discharging being followed by charging of a capacitor through resistor 118.

The voltage across resistor 112 is normally at a minimum value, and is increased when the RF output voltage from the generator reaches a predetermined peak threshold value. The circuitry which brings about this effect will now be described.

Output voltage detection is provided by a peak voltage detector coupled across the output terminals of the

generator. The detector includes a capacitive divider chain 122, 124 connected across the RF output, the tap between the capacitors feeding the primary winding of an isolating transformer 126. Resistors 128 and 130 connected across the primary and secondary windings of transformer 126 respectively provide damping to avoid unwanted resonances and to filter high frequency components which may occur during arcing at the active electrode. The resulting sensing voltage appearing at the secondary winding of transformer 126 is then fed to two comparators 132 and 134. At this point, it should be appreciated that only the sense voltage half cycles of one polarity (in this case the positive-going half cycles) are used for peak output voltage threshold detection.

Each comparator 132, 134 has two inputs, one connected to the transformer 126 to receive the sense voltage, and one connected to a respective reference voltage input 136, 138 (labelled CLAMP and BOOST in Figure 8). Reference voltages applied to these inputs 136, 138 are computer generated set voltage thresholds for the desiccation and vaporisation modes respectively. Selection of the operating mode is brought about by a control signal (DES/VAP) applied to control input 140, and the logic chain comprising gates 142, 144, 146, and 148. Desiccation mode is set by logic level "1" at input 140. In vaporisation mode, logic level "0" on this input effectively disables the output of comparator 132 via NOR gate 144, the output threshold detection then being fed through NOR gate 146. It will therefore be appreciated that the CLAMP voltage applied to input 136 is the reference voltage setting the threshold value for the peak output voltage during desiccation, while the BOOST voltage applied to input 138 sets the threshold value of the peak output voltage in the vaporisation mode.

When the output voltage reaches the set threshold value (i.e. a "limit" voltage), transistor 150 is switched on. This transistor is capable of charging capacitor 152 from 1.5V to 4V in a period of 50ns. The base charge of transistor 150 is sufficient to enlarge very narrow pulses from the voltage detection circuitry and therefore ensures that capacitor 152 attains maximum voltage for only marginally detected limit voltages at the RF output. Since the control signal applied to the base of transistor 150 is not averaged over a plurality of cycles, the transistor switches on and off during every cycle of oscillation of the radio frequency oscillator occurring when the peak output voltage threshold is exceeded. Consequently, the output voltage is monitored and controlled on a cycle-by-cycle basis. The function of capacitor 152 is to provide progressively lower reference voltages for comparator 78 after a limit voltage detection. Thus, the voltage on the emitter of transistor 150 has a waveform as shown at the output of the ramp generator 76 in Figure 6. In this way, the turn-on instant of device 80 is instantly retarded when the RF output voltage reaches the preset threshold value, and is subsequently progressively advanced as the voltage across resistor 112 slowly decreases. The discharge rate of capacitor 152 is de-

termined by the parallel combination of resistor 112 in parallel with resistor 114 plus resistor 116.

Switching energy provided by transistor 80 is converted by a series inductor 154P into a current drive into the resonant primary winding 82P. The action of series inductor 154P smoothes energy injection into the resonant output circuit represented by winding 82P and capacitor 84 and prevents excessive initial current through transistor 80, and excessive swinging of the voltage input to winding 82P above the voltage on supply line 90.

Under full power conditions, the initial switch-on of transistor 80 occurs at an initial resonant voltage maximum across the resonant circuit. This creates a switch-on current zero as the inductor 154P is completely depleted of energy after each cycle. Current in this inductor rapidly builds up until a point is reached at which the voltage on winding 82P becomes negative. The inductor 154P then releases its energy into this reverse bias. The current zero at switch-off is then guaranteed by a blocking diode 156 which prevents the return of energy from the resonant circuit to the inductor 154P.

When the switch-on time of transistor 80 is reduced due to the output voltage reaching the predetermined set threshold, the primary voltage amplitude across winding 82P decreases to the extent that the primary peak amplitude is less than the supply voltage. In particular, the voltage minimum at the end of primary winding 82P coupled to transistor 80 no longer swings beyond the ground voltage. Energy can now no longer be released from inductor 154P back into the resonant circuit. A secondary path for stored energy in inductor 154P is provided by the fact that this inductor is the primary winding of a transformer 154 which has a second winding 154S coupled via a diode 158 to the supply line 90. Residual energy stored in inductor 154P at switch-off causes forward biasing of diode 158 through which the energy is recovered back into the supply. This recovery mechanism permits partial resonant primary amplitude levels without damaging switching transistor 80 by uncoupled energy creating excessive voltage.

The relationship between "on" time of transistor 80 and switching energy depends on a number of variables such as the initial energy storage of the resonant circuit 82P, 84, the loading on the output terminals 62 (which affects the Q of the resonant circuit), and the loading as it affects oscillation frequency, which all affect the non-linear energy storing rate of inductor 154P.

As has been described above, detection of the output voltage reaching a predetermined threshold value not only causes the duty cycle of the switching transistor 80 to be instantly reduced, but it also disables the switched mode power supply 66 (shown in Figure 5). This disabling effect is produced by feeding a signal from the output of the logic chain 142 to 148 via a filter 160 to remove RF transients to a DISABLE output 68A, which is connected to the switched mode power supply 66.

The generator output impedance is set to about 160

ohms. The effect of this choice will be evident from the following description with reference to Figures 9 and 10 which are graphs showing the variation of output power which can be produced by the generator into different load impedances.

Referring to Figure 9, the power delivered to the load is here shown as a function of load impedance for two different oscillator supply voltage settings. In both cases, it will be seen that, to the left of the power/impedance peak, an increase in load impedance leads to an increase in output power and, hence, an increase in output voltage. At higher impedances, to the right of the peaks, the voltage continues to increase, albeit less aggressively, as impedance increases.

One of the features of the preferred generator in accordance with the invention is that the output stage operates as an open loop oscillator with an output impedance (corresponding to the peaks in Figure 9) of about 160 ohms. This is considerably lower than the output impedance of conventional generators used for underwater electrosurgery, and contributes to the ability to prevent runaway arcing behaviour and consequent excessive tissue damage and electrode burn-out.

It should be understood that for desiccation, steam envelope generation at the electrode and arcing should be prevented. Conversely, for cutting or vaporisation, steam envelope generation and arcing are required, but to a level consistent with achieving the required tissue effect and the avoidance of electrode burn-out. Operating points for low and high power desiccation and cutting or vaporisation are shown in Figure 9.

A feature of the combination of the generator in accordance with the invention and an electrode assembly having two adjacent electrodes is that the output is virtually bistable. When operating in desiccation mode, the entire electrode surface is in contact with an electrically conductive medium and therefore the load impedance is comparatively low, consequently inhibiting the rise in output voltage to a level sufficient for arcing. Conversely, when in cutting or tissue vaporisation mode, the entire active electrode surface is covered with a layer of vapour which is of much higher impedance, and the vapour pocket is sustained by arcing within it so that nearly all of the power dissipation occurs within the vapour envelope. In order to traverse from a desiccation mode to the cutting mode, a high power burst is required, hence the positioning of the power/load curve peak between the desiccation and cutting operation points on the curve. By allowing the output power to increase with impedance in this way, a high power burst of sufficient energy to create arcing is achieved despite the low impedance presented by the electrodes. As the supply voltage to the oscillator is increased, it has a greater propensity to flip into the cut mode, whilst at lower supply voltage levels, the bistable nature of the output, although more pronounced, tends towards the desiccation state.

The bistable properties arise not only from the electrode impedance behaviour, but also from the shape of

the power/load impedance curve. The flatter the load curve, the more constant the output power across a band of impedances and the less pronounced the effect.

Referring to Figure 9, it will be appreciated that in the cut or tissue vaporisation mode, a power equilibrium point is achieved by virtue of the decreasing output power as impedance increases. In the desiccation mode, the equilibrium is less straightforward, because there are two impedance change mechanisms. The first mechanism is the heating of the conductive medium and/or tissue which, due its positive coefficient of conductivity, results in a falling impedance initially, so that when power is first applied, the operating point moves towards the lefthand side of the diagram in Figure 9. Consequently, there is a well-defined equilibrium point defined by the reduction in impedance with increasing power supply voltage, and the consequent reduction in delivered output power. However, when the saline medium or tissue fluids in contact with the active electrode start to boil, small water vapour bubbles begin to form which increase the impedance. When the generator is about to flip into the cutting mode, impedance rise due to steam formation is dominant. The impedance change therefore becomes positive with increasing supply voltage, and the operating point moves towards the righthand side of the diagram, which allows greater input power as a result of the shape of the load curve, causing a rapid change to cutting or vaporisation mode. As steam formation continues to increase, the increasing impedance causes a fall-off in delivered output power.

The applicants have found that the inherent equilibria described above may be insufficient to maintain a stable coagulation state or a stable cutting state. It is for this reason, that the RF output voltage from the RF oscillator 60 (Figure 5) is limited, the limiting occurring extremely rapidly, typically with a response time of 20µs or less. Excessive radio frequency interference is avoided by linear variation of the oscillator switching device "on" time in response to a feedback signal from the voltage threshold detector. This technique is used in conjunction with the RF oscillator having a comparatively low output Q when matched to the load, this Q being sufficient to suppress switching noise without inordinately damping the response to output voltage threshold detection.

By way of example, the effect of voltage threshold control for a particular electrode configuration is shown in Figure 10. The heavy lines 200, 202 indicate the modified power/load impedance characteristics. For desiccation, shown by line 200, the switched mode power supply is set to produce a peak (matched) open loop output power of between 75 watts and 110 watts, with the actual peak power in this case being about 90 watts. For cutting and vaporisation (shown by line 202), the peak power can be between 120 watts and 175 watts. In this case it is about 150 watts. As examples, the voltage thresholds are set at 180 volts peak for desiccation and 300 volts peak for cutting, as illustrated by the hy-

perbolic constant voltage lines 204 and 206 respectively. The power/impedance curves follow the respective constant voltage threshold lines to the right of their intersection with the unmodified open loop curves 208 and 210. Thus, it will be understood that the desiccation threshold line represents the maximum voltage that can be achieved in the desiccation mode before arcing is produced, whilst the cut threshold line limits the cutting or tissue vaporisation performance to achieve the desired tissue effect and, in the extreme, to avoid electrode burn-out. The desiccation threshold line also represents a voltage insufficient to achieve arcing for cutting or vaporising tissue.

A significant feature of the generator characteristic for electrosurgical cutting or tissue vaporisation is that at peak power (matched impedance) the load impedance lies between the impedances corresponding to the threshold voltages at that power level. In contrast, in the desiccation mode, the power/load impedance characteristic has a power peak at an impedance lying below the desiccation threshold line at that power level.

In practice, the output power in the desiccation mode will be higher than in the cutting or tissue vaporisation mode. The reason for this statement (despite the apparent contradiction with the load curves in Figure 10) is that the equilibrium points described above lie at different points on the respective curves. To ensure cutting, the high peak power of the higher curve is required to reach the cut threshold line (corresponding to 300 volts peak). The cutting mode then follows the cutting or vaporisation threshold line. The cutting operating point is defined by the load impedance created when a suitable level of arcing is occurring. Typically, the load impedance in these circumstances is greater than 1000 ohms. Thus, although a full 150 watt peak power is available to ensure that vapour pockets are formed to promote arcing for cutting, the actual power drawn during cutting or tissue vaporisation for this particular electrode example may be between 30 watts and 40 watts. This situation is more easily understood if reference is also made to Figure 3.

In the desiccation mode, the operating point is determined by the positive power coefficient of impedance arising from steam generation. Consequently, the equilibrium naturally occurs in the region of the peak of the desiccation mode power/load impedance curve.

Blended modes can be used by constantly alternating between desiccation and cut states or by altering the position of the thresholds.

#### Claims

1. An electrosurgical generator for supplying radio frequency power to an electrical instrument, the generator comprising a radio frequency output stage having at least a pair of electrosurgical output connections for the delivery of radio frequency power

to the instrument, a power supply coupled to the output stage for supplying power to the output stage, and control circuitry including sensing means for deriving a sensing signal representative of the radio frequency peak output voltage developed across the output connections, wherein the output stage comprises a resonant output circuit coupled to the output connections and a switching device coupled to the resonant output circuit, and wherein the control circuitry is operable to actuate the switching device to reduce the delivered radio frequency power.

2. A generator according to claim 1, wherein the switching device is connected between the resonant output circuit and one of a pair of supply rails of the power supply means, and connected so as to switch current repeatedly through the resonant output circuit at its resonant frequency, and wherein the control circuitry is so arranged and coupled to the switching device as to reduce the "on" time of the switching device during individual radio frequency switching cycles sufficiently rapidly to cause a 50% reduction in delivered output power within 100µs of the predetermined threshold having been reached.
3. A generator according to claim 1 or claim 2, wherein the switching device is a power oscillator device coupled to an oscillator feedback loop.
4. A generator according to any of claims 1 to 3, wherein the control circuitry is arranged to reduce the delivered radio frequency power by at least 50% in less than 100µs in response to the output voltage reaching a predetermined threshold.
5. An electrosurgical generator for supplying power to an electrosurgical instrument, the generator comprising a radio frequency output stage including a radio frequency power device and having at least a pair of electrosurgical output connections for delivery of radio frequency power to the instrument, a power supply coupled to the output stage, and control circuitry including sensing means for deriving a sensing signal representative of the load impedance across the output connections, the control circuitry having a first output coupled to the power device to reduce the radio frequency duty cycle thereof and a second output coupled to the power supply to effect a reduction in the average power supply voltage supplied to the output stage, the said reductions occurring in response to the sensing signal reaching a predetermined threshold value.
6. A generator according to claim 5, wherein the control circuitry has means including a ramp generator operable to cause a first control signal applied via

the first output to the power device initially to reduce the said duty cycle to cause at least a 50% reduction in the power delivered via the output connections and then progressively to increase the duty cycle at a less rapid rate until the sensing signal once again reaches the threshold value, and to cause a second control signal applied to the power supply via the second output to reduce the average power supply voltage for at least a minimum predetermined time interval the duration of which is several times greater than the duration of a single power device duty cycle reduction and progressive increase sequence.

7. An electrosurgical system including a generator for generating radio frequency power and an electrosurgical instrument having at least one electrode for use immersed in a conductive liquid, wherein the generator comprises an output stage including a radio frequency power device and at least a pair of output connections arranged to receive radio frequency power from the power device, one of the pair of connections being connected to the said electrode, and wherein the generator further comprises a control stage operable to reduce the conduction time of the power device during individual radio frequency cycles in response to a sensing signal representative of the peak output voltage across the output connections exceeding a predetermined sensing signal threshold value, whereby the radio frequency power delivered to the electrode structure is rapidly reduced when the conductive liquid is vaporised.
8. A system according to claim 7, wherein the electrode structure includes a projecting treatment electrode and a liquid contact electrode spaced from the treatment electrode, both electrodes being for use surrounded by the conductive liquid and each being connected to a respective one of the pair of output connections, the control stage being operable to reduce the conduction time of the power device when the conductive liquid at the treatment electrode is vaporised thereby to cause the collapse of vapour bubbles at the treatment electrode and a decrease in the electrical load impedance.
9. A system according to claim 8, wherein the electrosurgical instrument has an electrode structure having juxtaposed first and second electrodes for immersion in a conductive liquid, the first and second electrodes respectively forming a tissue contact electrode at an extreme distal end of the instrument and a return electrode proximally spaced from the tissue contact electrode.
10. A system according to claim 8 or claim 9, wherein the generator output stage includes a resonant circuit

circuit coupled between the power device and the output connections, and having a resonant frequency corresponding to the frequency of operation of the generator.

11. An electrosurgical system operable in at least a tissue desiccation mode and a tissue cutting or vaporisation mode comprising a generator for generating radio frequency power and an electrosurgical instrument coupled to the generator, the instrument having an electrode structure for operation immersed in a conductive liquid, wherein the generator includes a mode selection control and has power control circuitry for automatically adjusting the radio frequency power supplied to the electrode structure to limit the peak generator output voltage to a first value when the desiccation mode is selected and to at least one second value when the cutting or vaporisation mode is selected, the second value or values being higher than the first value.
12. A system according to claim 11, wherein the first and second values are in the ranges of from 150V to 200V and from 250V to 600V respectively, the voltages being peak voltages.
13. A method of operating an electrosurgical system having at least a tissue desiccation mode and a tissue cutting or vaporisation mode, the system having a radio frequency power generator coupled to an electrode assembly having an electrode for operation in a conductive liquid, wherein the method comprises:
  - selecting one of the said modes;
  - when the desiccation mode is selected, automatically adjusting the radio frequency power supplied to the electrode assembly to maintain the conductive liquid adjacent the electrode at its boiling point for tissue desiccation without creating a vapour pocket surrounding the electrode; and
  - when the cutting or vaporisation mode is selected, automatically adjusting the radio frequency power supplied to the electrode to maintain a vapour pocket surrounding the electrode.
14. A method according to claim 13, wherein, in the cutting or vaporisation mode, the radio frequency power supplied to the electrode is automatically limited to prevent overheating of the electrode.
15. A method according to claim 14, wherein the radio frequency power supplied to the electrode is automatically adjusted by limiting the output voltage applied to the electrode to predetermined first and second voltage values, the first voltage value being used in the desiccation mode, and the second voltage

age value, which is higher than the first voltage value, being used in the cutting or vaporisation mode.

16. A method according to claim 15, wherein the first and second voltage values are in the ranges of from 150V to 200V and from 250V to 600V respectively, the voltages being peak voltages. 5
17. A method of operating an electrosurgical system which has a generator coupled to an electrode assembly having an electrode for operation in a conductive liquid, wherein the method comprises applying radio frequency power to the electrode, monitoring an electrical signal related to the load impedance presented to the generator, and reducing the applied power when the said signal reaches a predetermined threshold value associated with an increased load impedance, whereby only sufficient radio frequency power is applied to the electrode to maintain the liquid adjacent the electrode at its boiling point for tissue desiccation without creating a vapour pocket surrounding the electrode. 10  
15  
20
18. A method according to claim 17, wherein the monitored electrical signal is the peak output voltage applied to the electrode. 25
19. A method according to claim 17 or claim 18, wherein the applied power is reduced by at least 50% within 100µs of the peak output voltage exceeding the predetermined threshold. 30
20. A method according to any of claims 17 to 19, wherein the applied power is reduced by reducing the conduction period of a radio frequency output power device of the generator during individual radio frequency cycles. 35
21. A method according to claim 20, further including reducing the supply voltage supplied to the output power device simultaneously with the said reduction in the conduction period, and then progressively increasing the conduction period at a rate which is less than the rate at which the conduction period is reduced. 40
22. A method according to claim 20, wherein the generator has a switched mode power supply and the supply voltage reduction is achieved by disabling the output of a supply current switching device of the power supply for a whole number n of the power supply switching cycles, where n is greater than or equal to 1, until the said monitored electrical signal no longer reaches the predetermined threshold value. 45  
50
23. An electrosurgical generator for supplying radio frequency power to an electrosurgical instrument, the

generator comprising a radio frequency output stage having at least a pair of electrosurgical output connections for the delivery of radio frequency power to the instrument, means coupled to the output stage for supplying power to the output stage, and control circuitry including sensing means for deriving a sensing signal representative of the radio frequency output voltage developed across the output connections and means responsive to the sensing signal for causing a reduction in delivered output power independently of supply voltage or in addition to supply voltage reduction when the sensing signal is indicative of a predetermined threshold having been reached.

24. A generator according to claim 23, wherein the means for causing a reduction in delivered output power is operable to cause at least a 50% reduction in delivered output power when the sensing signal is indicative of the said threshold having been reached, the said reduction being effected within a period of 20µs or less. 20
25. A generator according to claim 24, wherein the response time of the control circuitry and the means coupled to the output stage to the radio frequency output voltage reaching the predetermined threshold is 100 µs or less. 25
26. A generator according to any of claims 23 to 25, wherein the means for causing a reduction in output power include a first control line coupled to the radio frequency output stage for feeding a first power reduction control signal to the said stage. 30
27. A generator according to claim 25 and claim 26, wherein the output stage includes at least one radio frequency power device and wherein the control circuitry is arranged such that the at least 50% reduction in output power is effected by reducing the period of conduction of the device during individual cycles of radio frequency oscillation independently of the supply voltage to the device. 35  
40
28. A generator according to claim 26 or claim 27, wherein the means for causing a reduction in output power further include a second control line coupled to the power supply means, the control circuitry being arranged such that a second power reduction signal is fed to the power supply means to effect a reduction in the average power supply voltage supplied to the output stage. 45  
50
29. A generator according to claim 27, wherein the means for causing a reduction in output power further include a second control line coupled to the power supply means, the control circuitry being arranged such that a second power reduction signal



is fed to the power supply means to effect a reduction in the average power supply voltage supplied to the output stage, and wherein the power supply means comprises a switched mode power supply circuit with output smoothing components, and wherein the supply circuit is arranged such that the second power reduction control signal has the effect of disabling the supply circuit.



30. A generator according to claim 27, wherein the control circuitry is operable repeatedly to effect a rapid reduction in the cycle by cycle conduction period of the power device from a peak level to a trough level followed by a less rapid progressive increase in the conduction period until the conduction period again reaches its peak level, the rapid reduction and progressive increase sequence being repeated until the said peak conduction period level can be reached without the output voltage exceeding the said predetermined threshold.
31. A generator according to claim 30, wherein the control circuitry and the power supply means are arranged such that the power supply circuit is enabled when the said peak conduction period has been maintained for a predetermined time.
32. A generator according to claim 31, wherein the control circuitry and the power supply means are arranged such that the power supply circuit is disabled until the end of a switched mode switching cycle in which the output voltage has not reached the said predetermined threshold for the whole of the switching cycle.
33. A generator according to any of claims 23 to 32, wherein the output stage has at least one radio frequency power switching device and frequency selective components which in combination with the switching device are operable to produce an output voltage waveform having a crest factor less than or equal to 1.7.
34. A generator according to any of claims 23 to 33, wherein the sensing signal is representative of a peak output voltage.
35. A generator according to any of claims 23 to 34, wherein, at least in a desiccation mode of the generator, the said predetermined threshold is in the range of 150V to 200V peak and is set independently of the supply voltage.
36. A generator according to any of claims 23 to 35, wherein the control circuitry is arranged such that in a coagulation mode of the generator the output voltage is limited to a first said predetermined voltage threshold, and in a cut or tissue vaporisation

mode of the generator the output voltage is limited to a higher, second said predetermined voltage threshold.

37. A generator according to claim 36, wherein the output stage has a power/load impedance characteristic which, for a constant average supply voltage, has a peak lying on the low impedance side of a line representative of the second predetermined voltage threshold.
38. A generator according to claim 37, wherein, in the cut or tissue vaporisation mode, the said generator power/load impedance characteristic lies between the line representative of a the second predetermined voltage threshold and a line representative of the first predetermined voltage threshold, and wherein in the coagulation mode the said characteristic has a peak which lies on the low impedance side of the line representative of the said first voltage threshold.
39. A generator according to any of claims 23 to 38, wherein the sensing means are coupled between the said output connections.
40. A generator according to claim 39, wherein the sensing means include a transformer having a primary winding coupled across one element of a potential divider connected across the said output connections.
41. A generator according to any of claims 23 to 40, having an output stage operable continuously in open loop configuration, and having an output impedance in the range of from 50 ohms to 250 ohms, and preferably between 130 and 190 ohms.



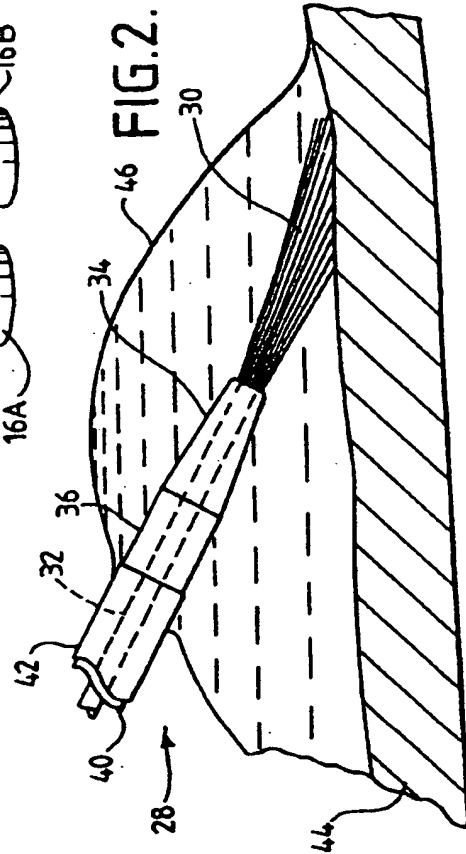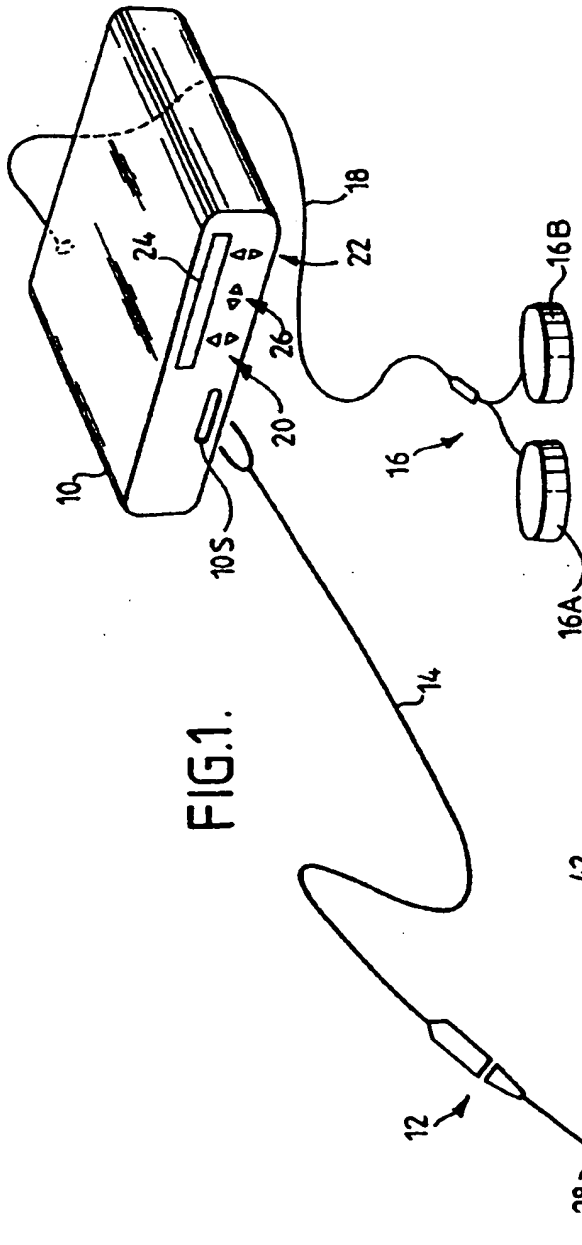

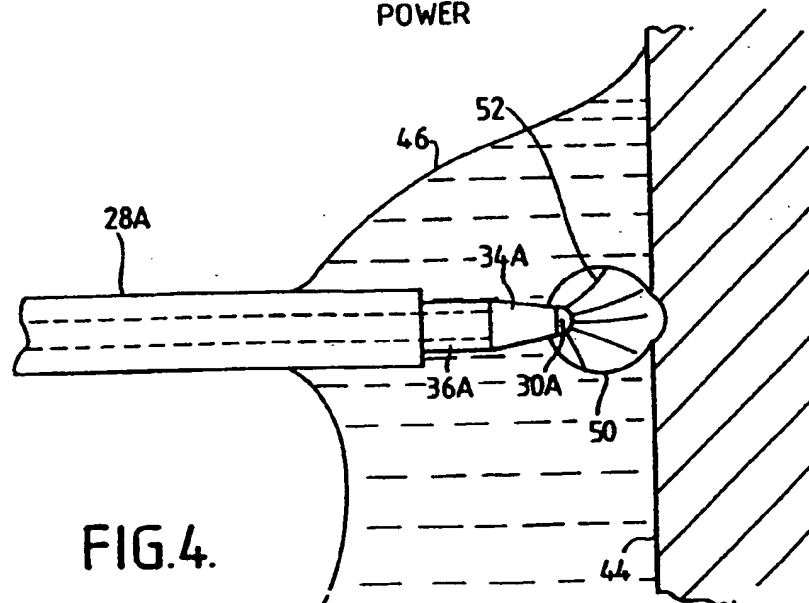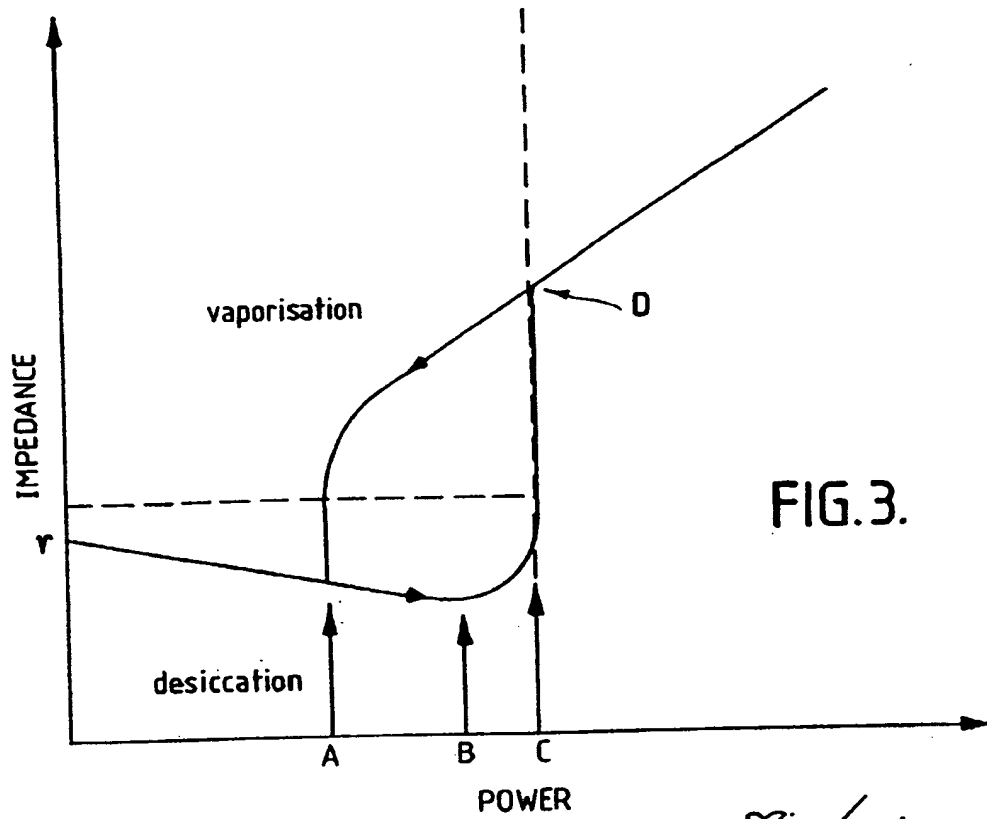

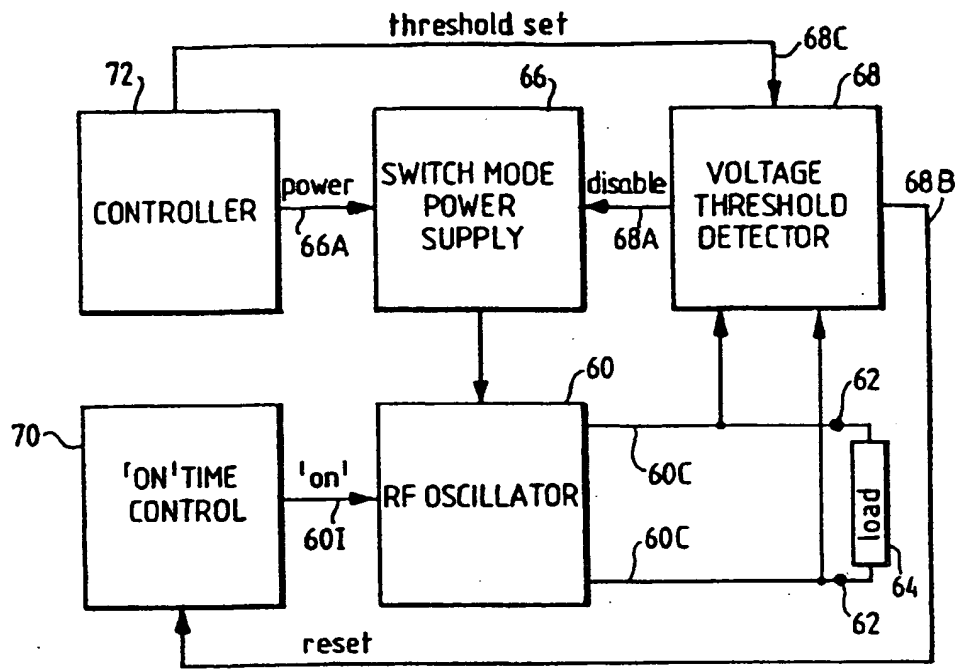


FIG. 5.

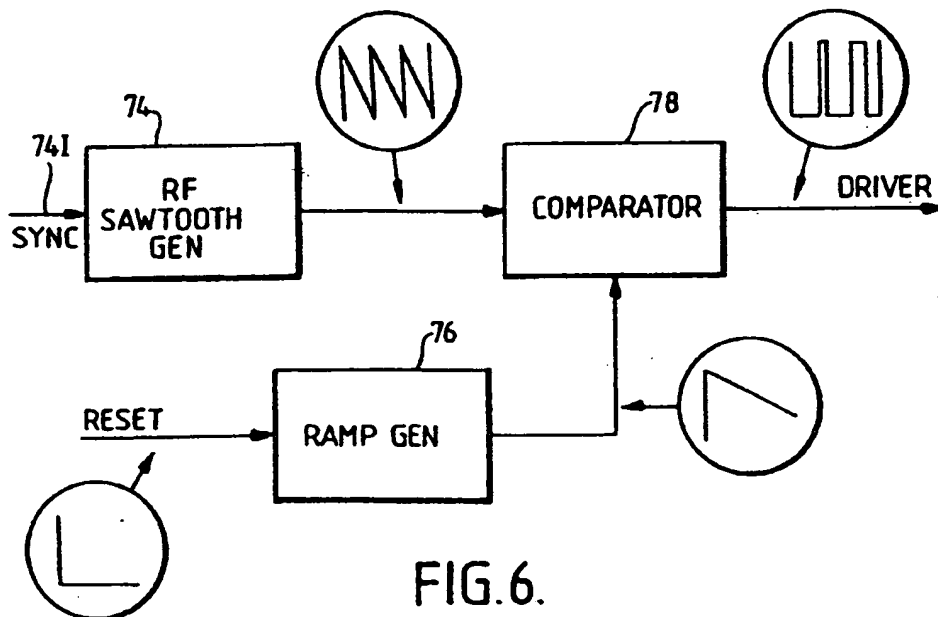
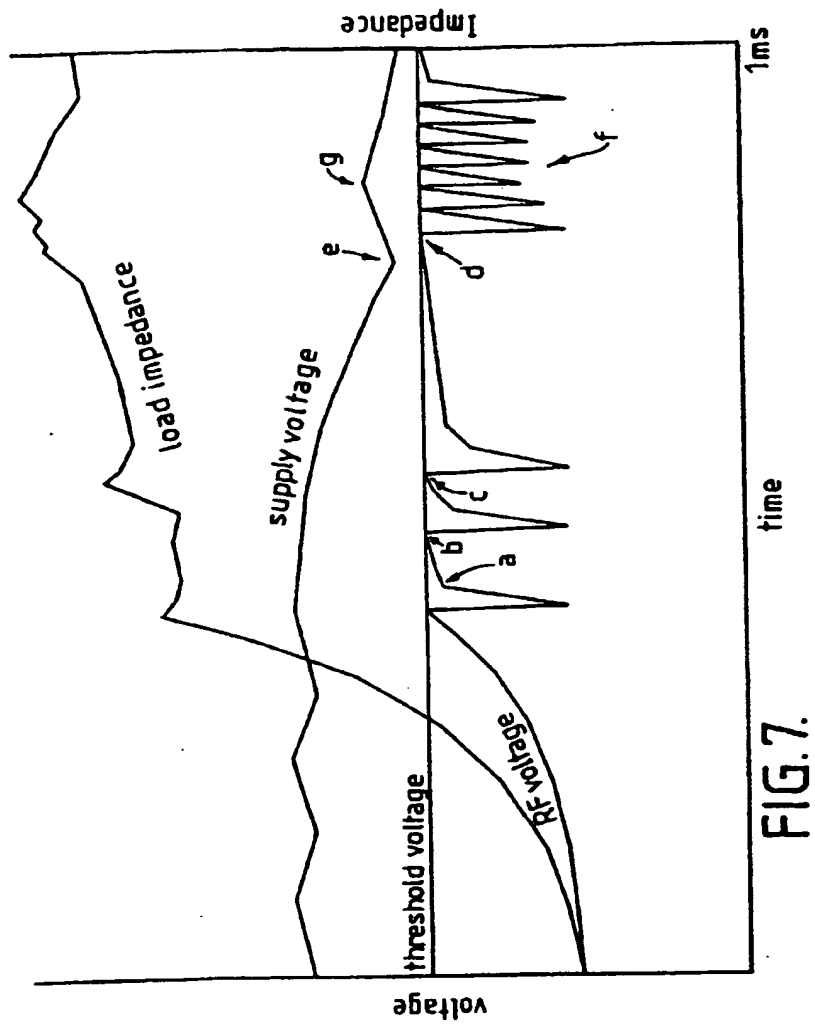


FIG. 6.



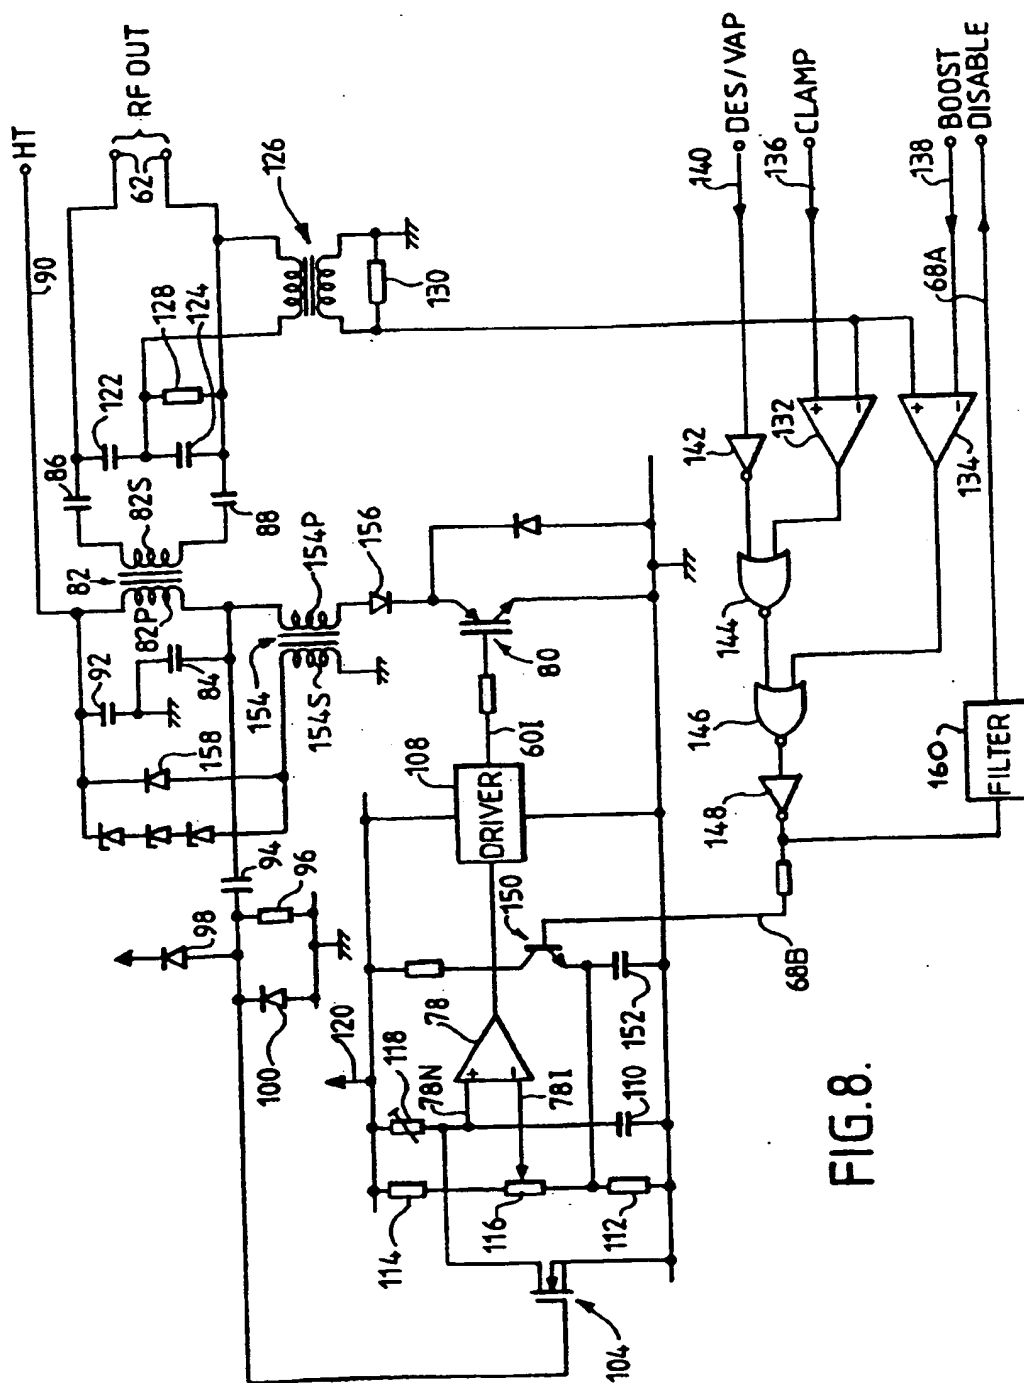


Fig. 8.

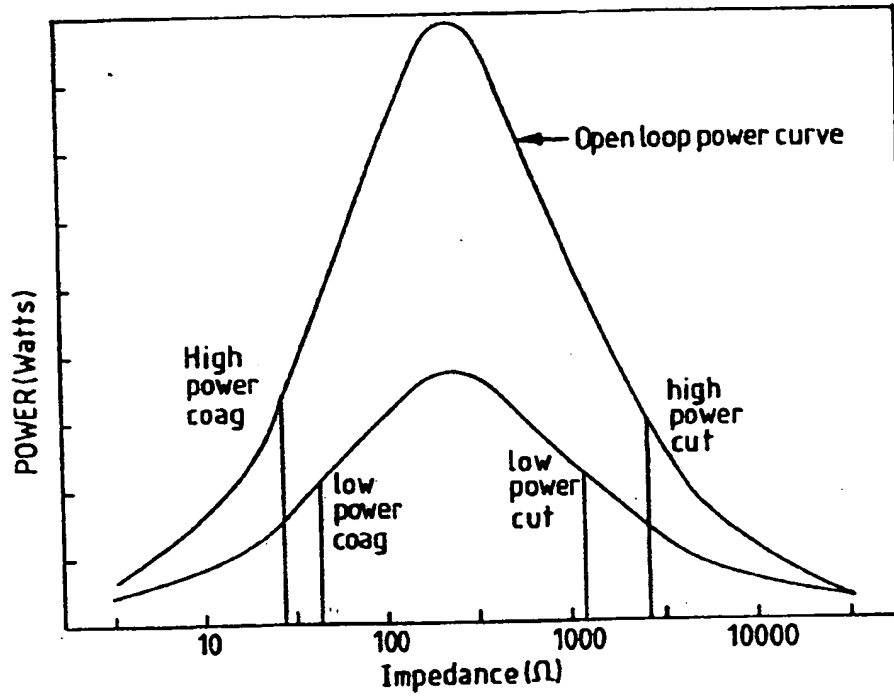


FIG.9.

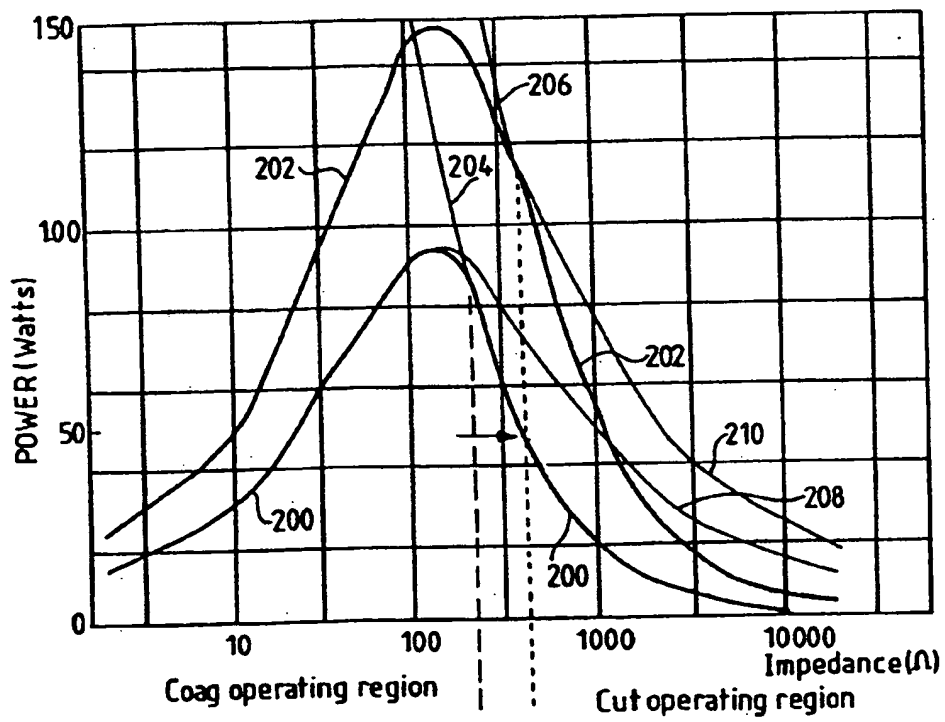


FIG.10.



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 754 437 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
19.03.1997 Bulletin 1997/12

(51) Int Cl.<sup>6</sup>: A61B 17/39

(43) Date of publication A2:  
22.01.1997 Bulletin 1997/04

(21) Application number: 96304558.8

(22) Date of filing: 19.06.1996

(84) Designated Contracting States:  
BE CH DE DK ES FR GB IE IT LI NL SE

(30) Priority: 23.06.1995 GB 9512888  
23.06.1995 GB 9512889  
29.12.1995 GB 9526627  
06.03.1996 GB 9604770

(71) Applicant: GYRUS MEDICAL LIMITED  
Cardiff CF3 0LX (GB)

(72) Inventors:  
• Goble, Nigel Mark  
Nr. Cardiff, CF3 8SB (GB)  
• Goble, Colin Charles Owen  
Penarth, South Glamorgan, CF64 1AT (GB)

(74) Representative: Blatchford, William Michael et al  
Withers & Rogers  
4 Dyer's Buildings  
Holborn  
London EC1N 2JT (GB)

(54) An electrosurgical generator and system

(57) An electrosurgical system including an electrode assembly having two electrodes for use immersed in an electrically conductive fluid has a generator with control circuitry for rapidly reducing the delivered radio frequency output power by at least 50% within approximately 100µs, corresponding to the time needed for a few cycles of the peak radio frequency output voltage to reach a pre determined threshold limit. In this way, tissue coagulation can be performed in, for example, saline without significant steam generation.

The same peak voltage limitation technique is used

in a tissue vaporization or cutting mode to limit the size of the steam pocket at the electrodes and to avoid electrode burning.

The output power reduction is obtained by "on time control" (70) by producing a signal synchronous with the RF oscillator, thereby reducing progressively the "conduction state" of the gate (80) which connects the power supply with the oscillator. Switch mode power supply (66) can itself vary its output voltage as a function of signal (66) from the controller (72), the speed of variation however will be much slower than the one produced by "ON" time control mechanism.

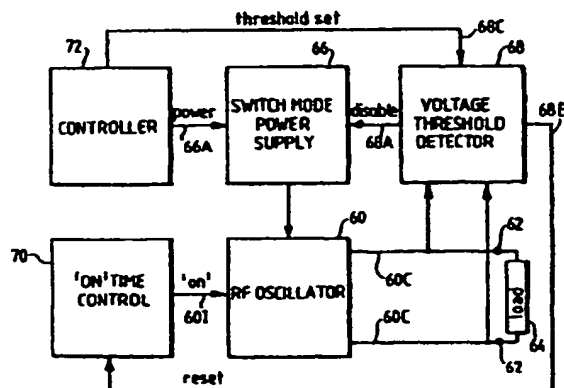


FIG. 5.





European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 96 30 4558

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 316 469 A (ERBE) * column 7, line 40-43 * * column 8, line 27-32 * * figure 1 *	1	A61B17/39
A	US 4 727 874 A (BOWERS) * figure 1 * * column 4, line 37-43 * * column 5, line 53-56 *	1	
A	DE 31 19 735 A (DELMA) * abstract *	1	
A	US 4 617 927 A (MANES) * abstract *	7,11	
A	US 5 108 391 A (FLACHENECKER) * the whole document *	11,13	
A	GB 2 133 290 A (LOMBARDI) * abstract *	23	
A	GB 2 164 473 A (C R BARD) * abstract; figure 1 *	23	
A	US 4 114 623 A (MEINKE) * the whole document *		
A	DE 41 26 608 A (FASTENMEIER) * abstract *		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 24 January 1997	Examiner Papone, F
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1831 (Rev. 1/95)



European Patent  
Office

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid.
- namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions.

namely:

see sheet -B-

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respects of which search fees have been paid.
- namely claims:
- ☐ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims.
- namely claims:

**LACK OF UNITY OF INVENTION**

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions, namely:

1. Claims 1-4:  
Generator sensing peak output voltage, with switching device to reduce power
2. Claims 5-8,17-22:  
Generator sensing impedance and reducing duty cycle
3. Claims 7-10:  
Generator sensing peak output voltage to reduce conduction time
4. Claims 11-12,13-16:  
Generator having two levels of output peak or output voltage as a function of two operational modes
5. Claims 23-41:  
Generator having reduction of power independently or in addition to supply voltage reduction

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**